The Timber Maze

Rfcb101

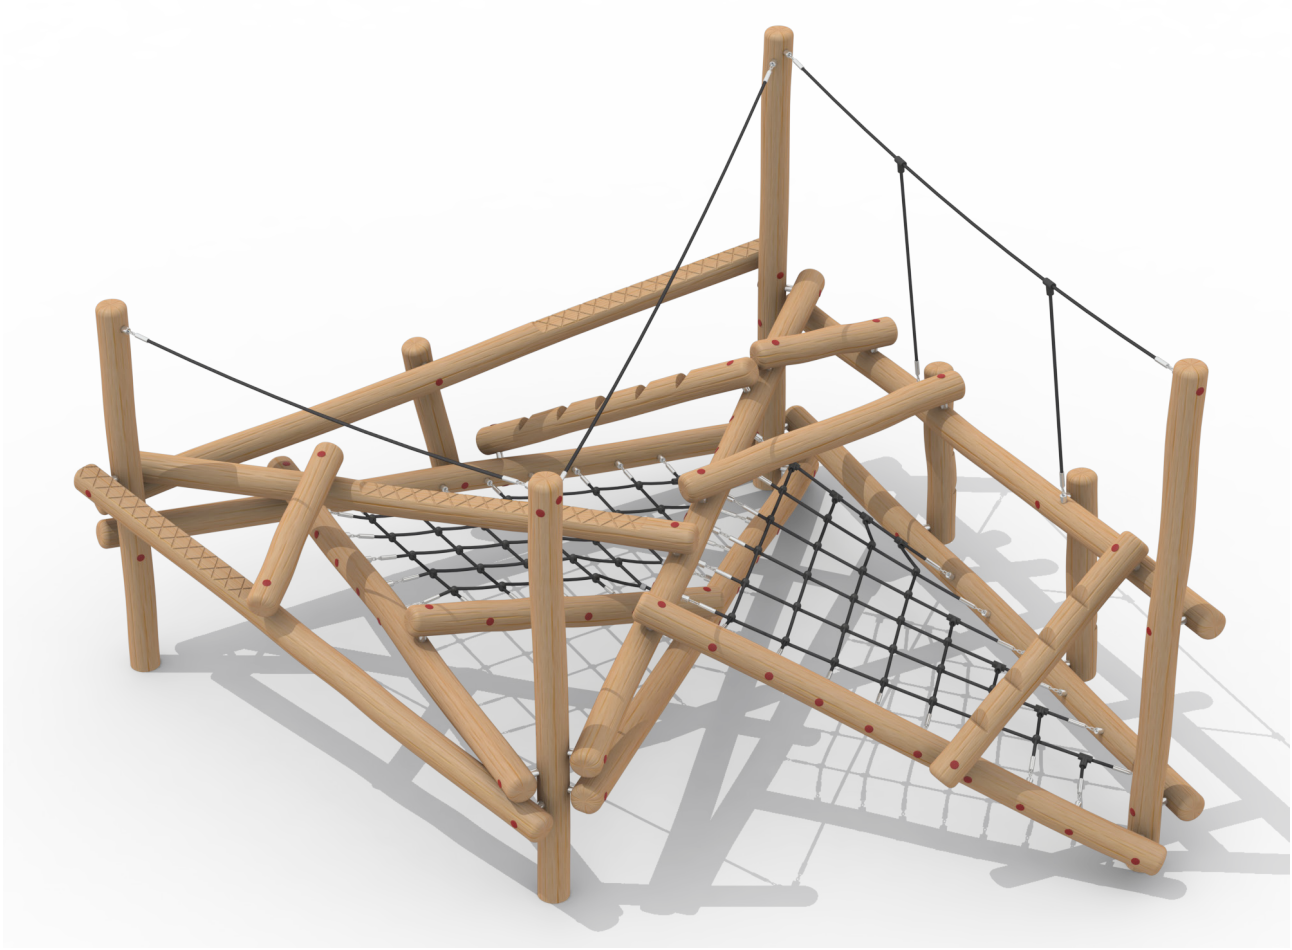

Serial number	Rfcb101
Product line	Climb & Balance
Dimensions	≈ 427 * 425 cm
Height	≈ 270 cm
FFH	150 cm
In accordance with norm EN	EN1176:17
Age group	3 +
Key user group	3 – 8 years
Inclusive	No
Number of users	12
Platform height	100 cm

Warranty

10 **10-year guarantee** - Coverage includes structural failure of the robinia components and structures.

5 **5-year guarantee -** Structural strength of steel and stainless steel components

2 **2-year guarantee -** Structural failure of high density polyethylene and plastic components

Check the warranty card for more information

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone

Activities

TOROSPLAY

Options

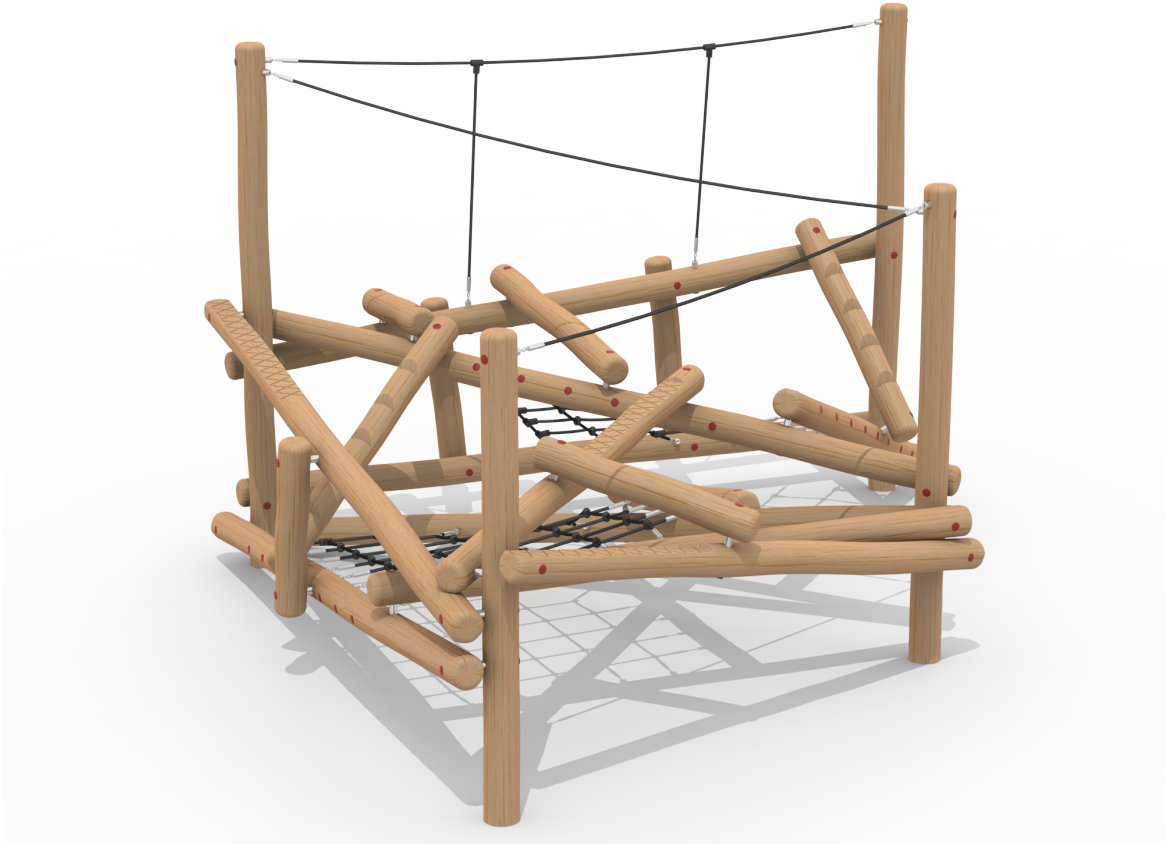

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone

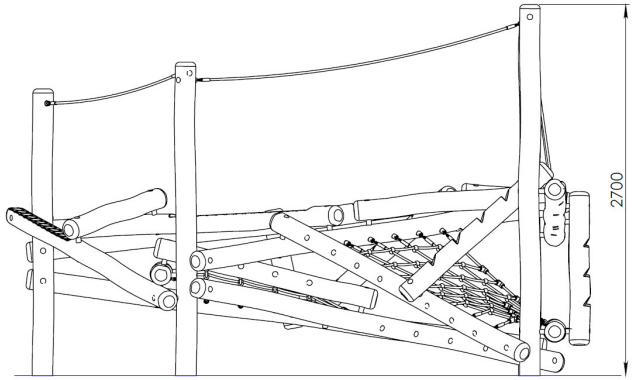

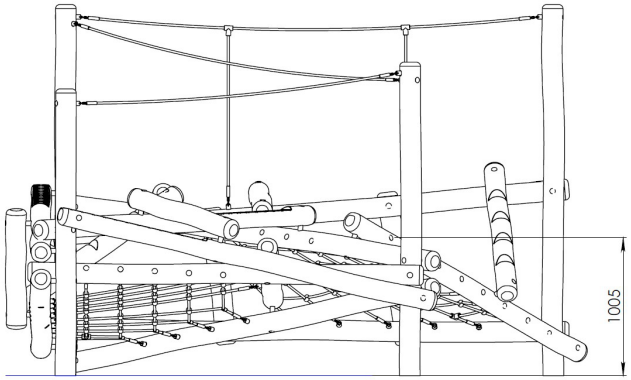

This playground structure is a dense climbing maze made from interlocking wooden beams, creating a challenging, natural obstacle course. The angled beams are layered to form various paths for children to climb, crawl, and balance, offering a stimulating and engaging play experience. Suspended ropes with rings add an extra element of adventure, allowing kids to swing and navigate through different sections. Its rustic design fits well in outdoor settings, encouraging imaginative, forest-themed play.

Cargo details

On a single pallet:

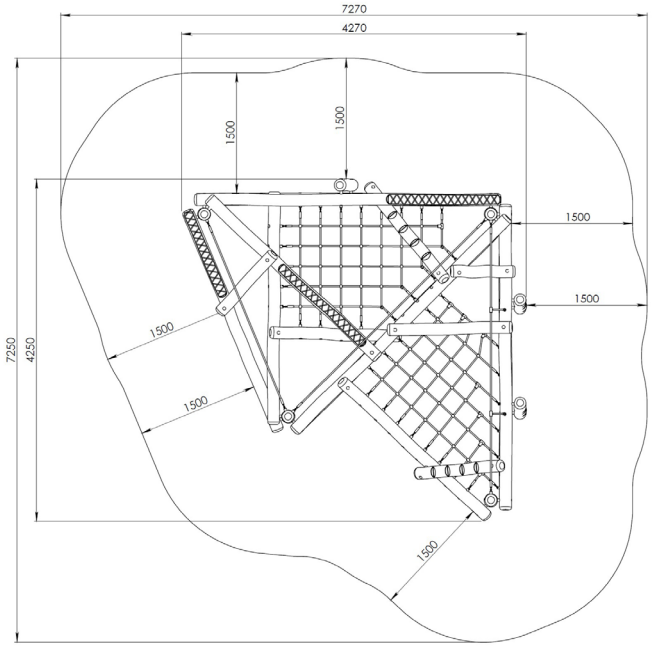

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone

The hardware is made of stainless steel or galvanized steel to ensure durable connections with a high corrosion resistance. This robust construction guarantees long-lasting performance even in harsh environments.

Design your own:
Wide color pallet to choose colors from
We use only certified EN71 chemical free paints

Robinia boards – 9/14 * 2,5.
Sanded, chamfered R=5mm,
Quality – A,B

Robinia poles 14 – 22 cm in diameter, best possible quality, sanded

16 and 18 mm
PP-Multifilament & split film
Or Braided nylon
Steel core – highest quality

Rope color options

Solid T and X connector ensure the Durability of the nets we produce

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone

TOROSPLAY

Surfaces according to EN 1176-1:2017

TOROSPLAY

№	Material	Description	min. layer thickness mm	max. fall height mm
1.	concrate			≤ 600
2.	asphalt			≤ 600
3.	topsoil			≤ 1000
4.	turf			≤ 1500
5.	bark	20 - 80 mm grain size borken bark of conifers	200	≤ 2000
			300	≤ 3000
6.	wood chips	5 - 30 mm grain size mechanically broken wood, without bark and leaf components	200	≤ 2000
			300	≤ 3000
7.	sand		200	≤ 2000
			300	≤ 3000
8.	gravel		200	≤ 2000
			300	≤ 3000
9.	other		according to producer	≤ 3000

Installation method Type A: ≈ 1,3 m3 concrete into the ground

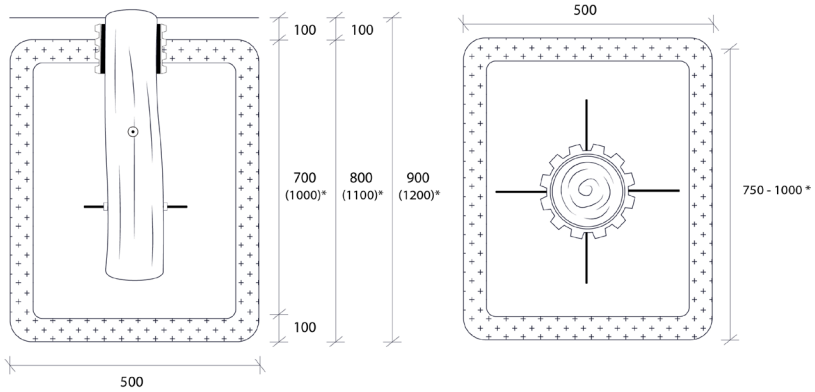

Installation method Type B: Anchoring

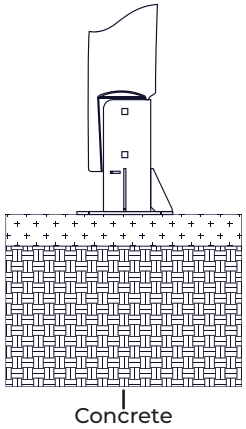

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone