


Rfs106

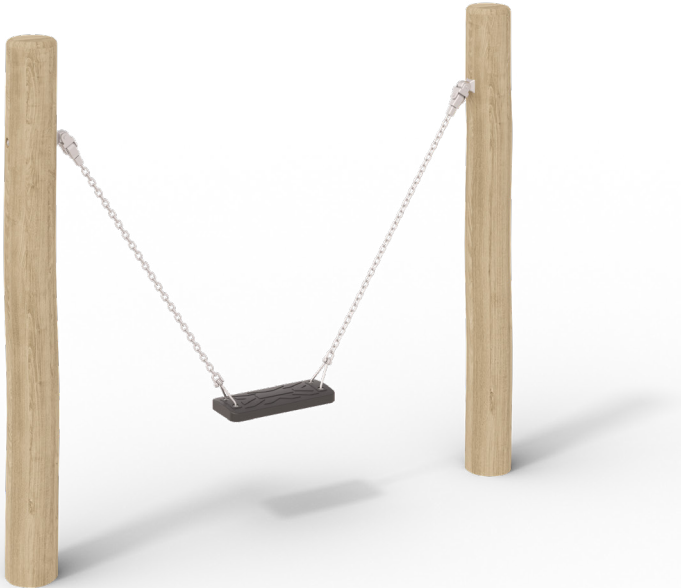

Serial number	Rfs108
Product line	Swings
Dimensions	≈ 193 * 30 cm
Height	≈ 180 cm
FFH	120 cm
In accordance with norm EN	EN1176:17
Age group	3 +
Key user group	3 – 8 years
Inclusive	No
Number of users	1
Swings height	46 cm

Warranty

- 10

10-year guarantee - Coverage includes structural failure of the robinia components and structures.
- 5

5-year guarantee - Structural strength of steel and stainless steel components
- 2

2-year guarantee - Structural failure of high density polyethylene and plastic components

Check the warranty card for more information

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone

Activities






The rubber swing seat is made using injection-molded thermoplastic elastomer (TPE) and features a reinforced insert made from injection-molded polyamide (PA). The chain includes a D-shackle at the top. Both the seat and the chain can be purchased separately.



Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone

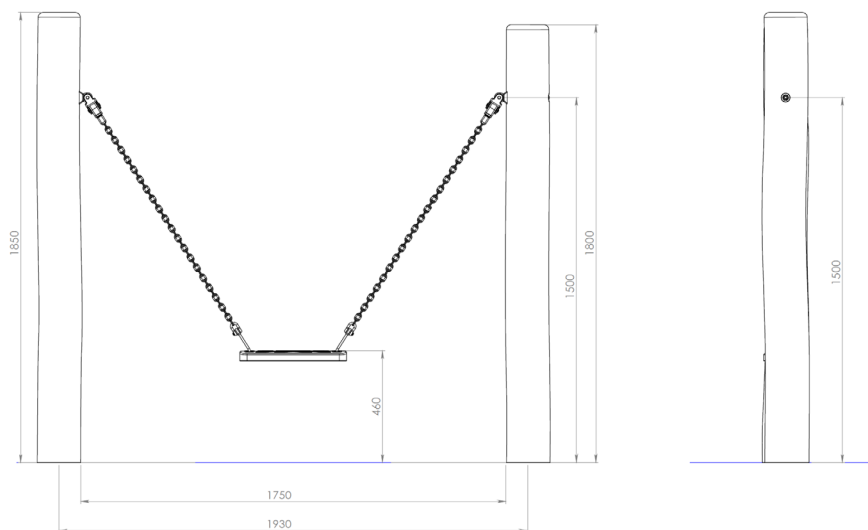


This playground swing set features a minimalist design with two vertical wooden posts supporting a single flat-seated swing. The swing is suspended by metal chains attached to the top of each post, providing a stable and simple structure. The absence of a horizontal beam gives it an open, airy feel, while still maintaining functionality. The natural wood posts add a rustic touch, blending well with outdoor environments. This setup is designed for individual use, offering a straightforward, durable swing experience.

Cargo details



On a single pallet: 180*50*30 / 95 kg

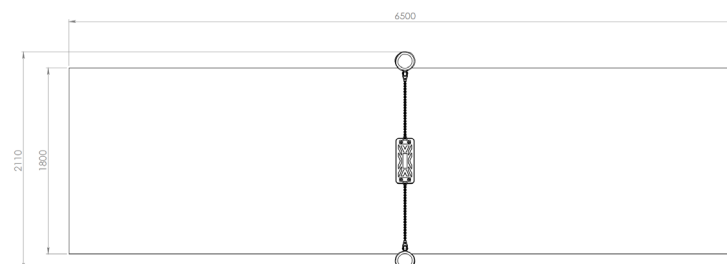

Torosplay Ltd.


Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone



The hardware is made of stainless steel or galvanized steel to ensure durable connections with a high corrosion resistance. This robust construction guarantees long-lasting performance even in harsh environments.



Design your own:
Wide color pallet to choose colors from
We use only certified EN71 chemical free paints

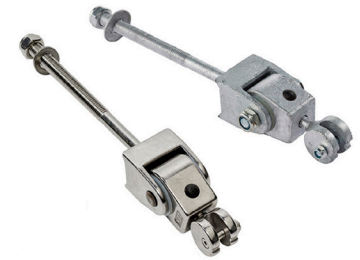

Swing hook is suitable for both round and square wood. The length of the threaded bar is M12 x 160 mm.



Robinia poles 14 – 22 cm in diameter, best possible quality, sanded



16 and 18 mm
PP-Multifilament & split film
Or Braided nylon
Steel core – highest quality



Rope color options



Solid T and X connector ensure the Durability of the nets we produce



This is a durable metal chain, likely made of galvanized or stainless steel, designed for swing sets and other heavy-duty applications.

Torosplay Ltd.

Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone


TOROSPLAY

Surfaces according to EN 1176-1:2017

TOROSPLAY

Nº	Material	Description	min. layer thickness mm	max. fall height mm
1.	concrete			≤ 600
2.	asphalt			≤ 600
3.	topsoil			≤ 1000
4.	turf			≤ 1500
5.	bark	20 - 80 mm grain size borken bark of conifers	200	≤ 2000
			300	≤ 3000
6.	wood chips	5 - 30 mm grain size mechanically broken wood, without bark and leaf components	200	≤ 2000
			300	≤ 3000
7.	sand		200	≤ 2000
			300	≤ 3000
8.	gravel		200	≤ 2000
			300	≤ 3000
9.	other		according to producer	≤ 3000

Installation method Type A: ≈ 1,3 m³ concrete into the ground

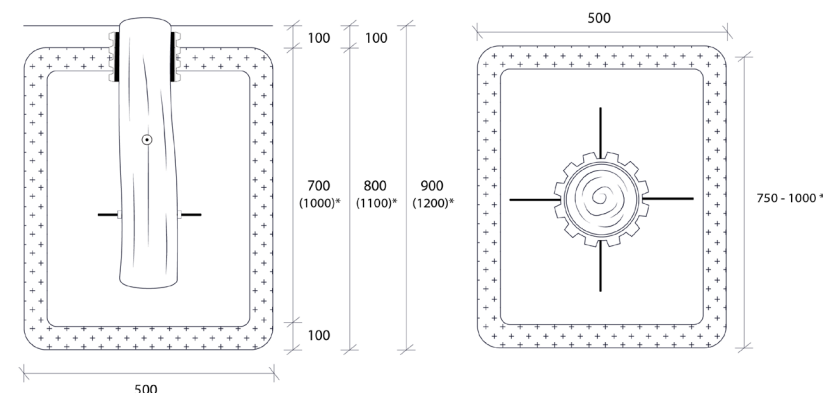

Installation method Type B: Anchoring

